



AX 700 BT - GN2/1

ARMADIO ACCIAIO BT VENTILATO
VENTILATED STAINLESS STEEL DEEP FREEZER



RAGGIO DI TEMPERATURA
TEMPERATURE RANGE



-18 °C
-22 °C



VOLUME NETTO
NET VOLUME

LT. 650



DIMENSIONI ESTERNE (LxPxH)
EXTERNAL DIMENSIONS (WxDxH)

mm 740x830x2010



MENSOLE E DIMENSIONI (LxP)
SHELVES AND DIMENSIONS (WxD)

mm 600x400



pag. 120
INFORMAZIONI TECNICHE
TECHNICAL INFORMATION



LED | LED
ILLUMINAZIONE
LIGHTING



DIGITALE | DIGITAL
REGOLATORE TEMPERATURA
CONTROLLER



CHIAVE E SERRATURA
LOCK AND KEY



DIGITALE | DIGITAL
TERMOMETRO
THERMOMETER




ACCIAIO | STEEL
SUPERFICIE INTERNA
INNERLINER



CHIUSURA
AUTOMATICA PORTA
SELF CLOSING DOOR

pag. 76

AX 700 BT - G02/1

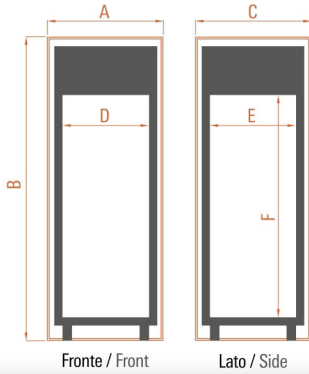

PESO NETTO NET WEIGHT	PESO LORDO GROSS WEIGHT	VOLTAGGIO VOLTAGE	FREQUENZA FREQUENCY	REFRIGERANTE REFRIGERANT	ASSORBIMENTO ABSORPTION	CONSUMO ENERGIA ENERGY CONSUMPTION
Kg 134	Kg 143	V 230	Hz 50	R404A	W 640	KwH/24H 12
IMBALLO / PACKAGING A mm 770 / B mm 2065 / C mm 860			DIMENSIONI INTERNE / INNER DIMENSIONS D mm 620 / E mm 702 / F mm 1401			

pag. 77

AX 700 TN - G02/1



PESO NETTO NET WEIGHT	PESO LORDO GROSS WEIGHT	VOLTAGGIO VOLTAGE	FREQUENZA FREQUENCY	REFRIGERANTE REFRIGERANT	ASSORBIMENTO ABSORPTION	CONSUMO ENERGIA ENERGY CONSUMPTION
Kg 134	Kg 143	V 230	Hz 50	R134A	W 360	KwH/24H 3,2
IMBALLO / PACKAGING A mm 770 / B mm 2065 / C mm 860			DIMENSIONI INTERNE / INNER DIMENSIONS D mm 620 / E mm 702 / F mm 1401			

pag. 78

AX 1500 BT



PESO NETTO NET WEIGHT	PESO LORDO GROSS WEIGHT	VOLTAGGIO VOLTAGE	FREQUENZA FREQUENCY	REFRIGERANTE REFRIGERANT	ASSORBIMENTO ABSORPTION	CONSUMO ENERGIA ENERGY CONSUMPTION
Kg 198	Kg 213	V 230	Hz 50	R404A	W 800	KwH/24H 15
IMBALLO / PACKAGING A mm 1505 / B mm 2070 / C mm 855			DIMENSIONI INTERNE / INNER DIMENSIONS D mm 1401 / E mm 702 / F mm 1507			

pag. 78

AX 1500 TN



PESO NETTO NET WEIGHT	PESO LORDO GROSS WEIGHT	VOLTAGGIO VOLTAGE	FREQUENZA FREQUENCY	REFRIGERANTE REFRIGERANT	ASSORBIMENTO ABSORPTION	CONSUMO ENERGIA ENERGY CONSUMPTION
Kg 198	Kg 213	V 230	Hz 50	R134A	W 520	KwH/24H 5,4
IMBALLO / PACKAGING A mm 1505 / B mm 2070 / C mm 855			DIMENSIONI INTERNE / INNER DIMENSIONS D mm 1401 / E mm 702 / F mm 1507			